


PLAN VIEW

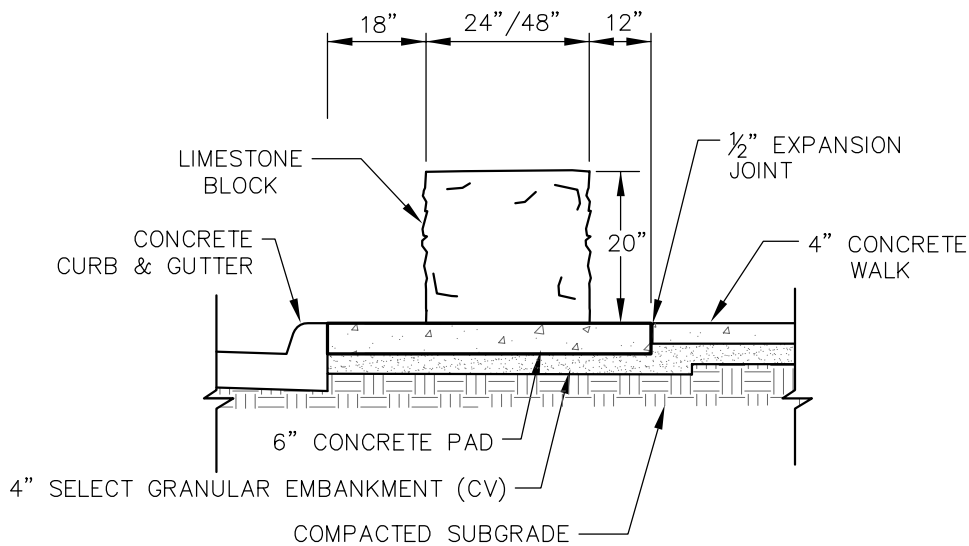

PROFILE VIEW

NOTES:

1. A LANDSCAPE MONUMENT SHALL INCLUDE TWO LIMESTONE BLOCKS CONSISTING OF A 24" WIDE BY 20" TALL BY 48" LONG BLOCK AND 24" WIDE BY 20" TALL BY 24" LONG BLOCK.
2. LIMESTONE BLOCK SHALL BE PLACED IN AN "L" FORMATION, WITH A MINIMUM OF 36" BETWEEN BLOCKS.
3. TOP AND BOTTOM OF LIMESTONE BLOCK TO BE DIAMOND SMOOTH.
4. FRONT, BACK, AND SIDES OF LIMESTONE BLOCK TO BE QUARRY SAWN.
5. ALL LABOR, MATERIALS, AND EQUIPMENT TO FURNISH AND INSTALL THE LANDSCAPE MONUMENT SHALL BE PAID PER BID ITEM 2540, "LANDSCAPE MONUMENT." THE 6" CONCRETE PAD TO BE PAID USING THE 6" CONCRETE BID ITEM.
6. THE CONTRACTOR SHALL VERIFY LOCATIONS WITH THE ENGINEER PRIOR TO PLACEMENT.