


EXISTING STREET

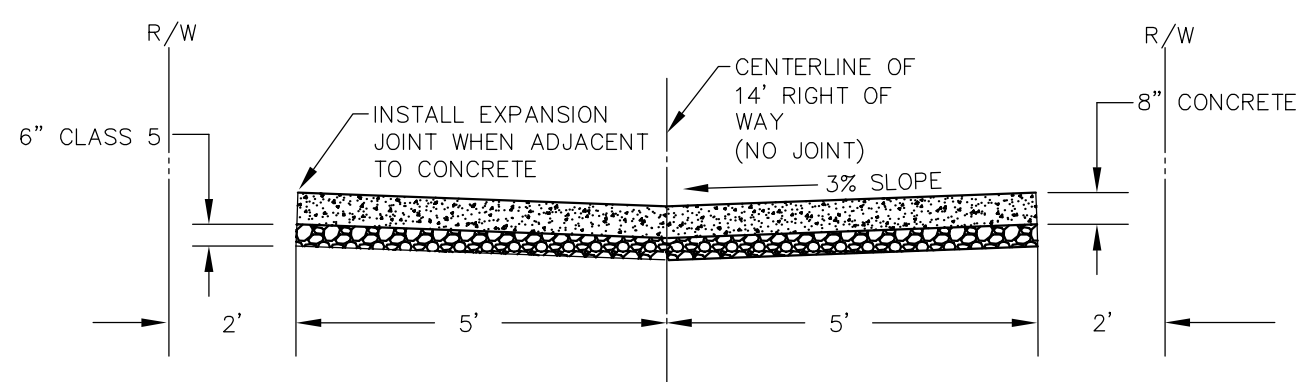

CROSS SECTION OF ALLEY

NOT TO SCALE

CONCRETE THICKNESS SCHEDULE		
DRIVEWAY	THICKNESS	AREAS
ALLEY	8"	APRON, BLVD. SLAB, SIDE-WALK.

NOTES:

1. CONCRETE TO BE MnDOT 3F52 MIX DESIGN WITH 6% ± 1% AIR CONTENT.
2. CONSTRUCTION JOINTS MUST BE SAWCUT AT 1/8" WIDE. 1/4" TOOLED WILL ONLY BE ACCEPTED WHERE SAWCUT JOINTS ARE NOT POSSIBLE.
3. CONCRETE CURB TO BE POURED INTEGRAL WITH APRON, MAX 5% CROSS SLOPE.
4. CONTROL JOINTS PER CONTRACTOR GUIDELINES. MUST BE LESS THAN OR EQUAL TO 12'.
5. CLASS 5 TO EXTEND 12" BEYOND CONCRETE WHERE POSSIBLE.